
LED HIGHBAYS
POWER ADJUSTABLE

100W/150W - IP65 - Black

LUMIO

Product Dimensions

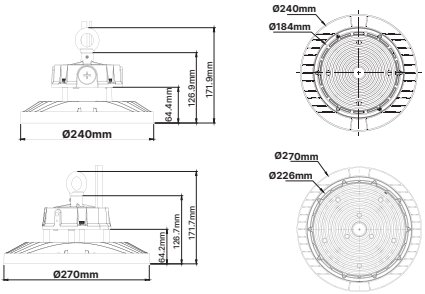

Product Specifications

Voltage	220-240V~ 50Hz		
Colour temperature	5000K		
Selectable Power	14818 (100W)	100W	15,500lm
		80W	12,300lm
		60W	9,800lm
	14819 (150W)	150W	23,000lm
		120W	18,500lm
		90W	14,600lm
Ambient temperature	45°C		
Colour rendering index	>80		
Beam angle	90° lens		
Dimmable	Yes (1-10V)		
IP rating	IP65		
IK rating	IK09		
Electrical classification	Class I		
Wiring	Flex & plug 1.5m		
Mounting type	Surface mounted		
Warranty	3 Years		


Product Range

Model/Description	Code	SKU
100W LED Highbay	1128260	14818
150W LED Highbay	1128258	14819


Installation Steps

Switch off mains power at the switchboard before commencing installation. Remove the light from it's packaging and inspect for any signs of damage, particularly to the supplied flex and plug. Should any damage be visible, immediately return the product to place of purchase. DO NOT dismantle the light or attempt to repair.


Attach the eye bolt to the fitting. Making sure the screws are tight.



Unscrew dip switch cover to access the power adjustable dip switch. Select desired wattage and refit cover.



Select installation point on ceiling or overhead support structure and securely mechanically fix suspension chain/ rod/wire. The use of adhesives of double-sided tape is NOT recommended. DO NOT SUSPEND THE FITTING VIA THE MAINS CABLE..



Ensure the mains cable reaches the power outlet without tension once installed. Attach the eye-bolt to the end of the suspension chain/rod/wire to mount the fitting, then plug in the mains cable.

Restore mains power at the switchboard.

SAFETY WARNINGS

Read instructions carefully before installation. Failure to follow instructions may result in electric shock, fire and/or serious injury.

This product must only be installed by a suitably qualified person
Before commencing installation turn off and isolate the electrical supply.
Supply voltages within product. Isolate supply voltages before opening or servicing.
There are no user serviceable parts. Do not attempt to service other parts as this will void the warranty.
As the installer, it is your responsibility to ensure you comply to all relevant building and safety codes. Refer to application standards for the relevant rules.
The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
Do not insulation test over 500vdc.
The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
WARNING: CAUTION - RISK OF ELECTIC SHOCK

1–10V Dimming Wiring Diagram


This highbay driver includes a 1–10V dimming control cable for connection to a compatible 1–10V dimming control system. This product is only compatible with 1–10V dimming and is not compatible with DALI, DMX, or other dimming protocols. Wiring must be carried out by a qualified, licensed electrician in accordance with local electrical safety standards. If the dimming function is not being used, the cable should be left safely secured in place and not left exposed

Wire identification:

DIM+ (Purple): Positive dimming control signal wire, connects to the "+" terminal on the dimmer/control system.

Vaux+ (Black/White): Auxiliary low-voltage supply wire, providing power to the dimming control circuit.

DIM– (Pink): Negative dimming control signal wire, connects to the "–" terminal on the dimmer/control system.



Warranty

This gives you benefits that are additional to other rights and remedies that you may have pursuant to other laws relating to the Lumio lighting products. Those laws include the Australian Consumer Law and the New Zealand Consumer Law.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law or the New Zealand Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or warranty replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Nothing in this warranty is to be interpreted as excluding, restricting or modifying any law or statute applicable to the supply of Lumio products which cannot be excluded, restricted or modified by the Australian Consumer Law or the New Zealand Consumer Law (where applicable).

If you think your Lumio product is defective, you can choose to make a claim under:
1. The Australian Consumer Law in Australia;
2. The New Zealand Consumer Law in New Zealand; and/or
3. This warranty, as may be applicable.

Subject to the terms of this contractual warranty, if your Lumio products are defective, we will (at our election) repair or replace the Lumio products. Once we make this election (and take the relevant action), we will have honoured our obligations under this contractual warranty.

Our total liability under this warranty is limited to the cost of repair or replacement of the defective product (at our election). We otherwise exclude all liability in relation to the product to the fullest extent permitted by law (noting our comments above regarding the Australian Consumer Law and any other rights or remedies you may have).

Lumio warrants that it will remedy premature product failure and defects caused by faulty materials or workmanship in Lumio lighting products as follows:

Product Type	Warranty	Remedy
General Lighting (unless otherwise stated)	3Yr	Lumio products labelled 'return to base' are remedied at our own premises (or agent's premises). This means that you are responsible for returning the Product to us for repair, replacement or refund, and collecting the Lumio product from us once it has been repaired or replaced (at our discretion).
Emergency Lighting & Exits	3Yr	
Accessories and Batteries	1Yr	

All warranty periods apply from date of purchase. Date of purchase means the date that you purchased the Lumio product from a Lumio authorised retailer, unless marked otherwise.

For this warranty to apply, you must:

a. Have purchased the Lumio product from an authorised retailer in Australia or New Zealand;
b. Follow the manufacturer's instructions applicable to the Lumio products;
c. Follow the Industry Standards for installation and usage applicable to the Lumio products (if any);
d. Follow any other written or verbal instructions for installation, operation, care, repair and maintenance of the Lumio products. Those directions may be supplied with the Lumio products, printed on the labels, packaging or operation manuals, published on the Lumio website or otherwise published from time to time; and
e. Follow the claims procedure for making a warranty claim as outlined in this document

Within 7 days of any defect arising (or the day that you should have reasonably become aware of the defect), you must either return the defective goods to the point of sale for refund, or notify Lumio of the defect in writing through our claims processes.

What must be included in the warranty claim:

- proof of purchase (if available) date and place of purchase
- the item number/ code of the returned product and the number of items claimed
- the reason for the claim and written description of the defect (including photographs where reasonably possible)
- any information provided by the customer
- your written assurance that the Lumio products have not been:
  - incorrectly assembled or installed;
  - incorrectly operated or used or maintained;
  - incorrectly repaired or modified;
  - exposed to abnormal conditions; or
  - damaged by you (due to negligence or otherwise)
- request for labour allowance rates (if applicable)

To lodge a warranty claim, please visit our website at lumio.com.au/warranty

Alternatively you can make a claim directly via email at **sales@lumio.com.au** or telephone **1300 438 658**.

Once we receive your warranty claim, we will contact you within 2 working days.

This warranty does not apply to loss or damage caused by wear and tear, misuse, incorrect installation or operation, failure to clean and maintain, incorrect voltage or non-authorised electrical connections, adverse external conditions (such as power surges and dips, acts of God, exposure to heat, corrosion, insect or vermin infestation), use of non-authorised or defective parts or globes, or to items that have been repaired by a person other than us or a repairer approved by us.

Images are for illustrative purposes only.
Due to changes in industry standards and continual product development, product specifications are subject to change without notice.

For sales and product information telephone
Customer Service: 1300 438 658
New Zealand: 0800 235 867

Website: lumiolighting.com.au